



# COMMERCIAL STACK DRYER

Huebsch® has designed commercial dryers that offer the benefits of heavy-duty commercial quality with the attractive styling of homestyle dryers. With features like extra-large capacity and a no-hassle lint filter, Huebsch commercial laundry dryers allow you to focus on your day-to-day operations instead of your laundry.

## FAST DRYING TIMES

Huebsch dryers deliver fast drying results. A 7.0 cu. ft. cylinder with an 18 lb capacity offers ample space for large loads to tumble and produce fast drying times, while lowering utility consumption.

## EASY MAINTENANCE

A secured lint filter is located upfront to allow for easy cleaning between cycles.

## LARGE, RUGGED DOOR

Our dryer has a rugged door and hinge with the industry's largest door opening, 2.06 sq. ft. The doors are also reversible for installation flexibility.


## UNMATCHED DURABILITY

Our commercial dryer is manufactured at our Ripon, WI headquarters. The entire machine receives Huebsch's standard three-year warranty. In addition, Huebsch has more service representatives in the field than most brands have in their whole organization.

\*Parts only, labor not included. See Huebsch Warranty Bond for specifics.



## ELECTRONIC HOMESTYLE CONTROL

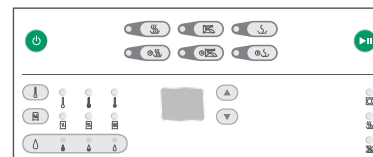

The Electronic Homestyle Control features a time-remaining display, six preset cycle buttons, cycle adjustability, cycle indicator lights and moisture level indicator lights.

# COMMERCIAL STACK DRYER

Specifications		Stack
Available Controls		Electronic Homestyle
Models	Electric	YSEE5AGS173TW01 YSEE5AGS153TW01
	Gas	YSGE5AGS113TW01
Capacity - lb (kg)		18 (8.2)
Cylinder Volume - cu. Ft. (liters)		7.0 (198)
Width - in (mm)		26.875 (683)
Depth - in (mm)		28 (711)
Height - in (mm)		78.17 (1986)
Motor Size - HP (kw)		0.33 (0.25)
Available Heat Sources		Electric or Gas
Available Heating Element (Electric W)		5350 @ 208V 5350 @ 240V
Gas Inlet Connection - in (mm)		3/8 (9.5)
Gas Consumption - BTU/Hr		22,500
Exhaust Outlet Diameter - in (mm)		4 (102)
Exhaust Airflow - cfm (liters/sec)		220 (105)
Available Cycles		Regular, Perm Press, Delicate, Time Dry, Quick Dry, Fluff Up
Cycle Indicator Lights		Yes
Cylinder Finish		Galvanized
Available Colors		White
Door Type (Solid/Window)		Solid
Available Electrical Requirements - (Voltage/Hz/Ph-Amp)	Electric	120/240/60/1 - 30 120/208/60/1 - 30
	Gas	120/60/1 - 15
Net Weight - lb (kg)	Electric	262 (119)
	Gas	270 (122)
Shipping Weight - lb (kg)	Electric	272 (123)
	Gas	280 (127)
Shipping Width - in (mm)		30 (762)
Shipping Depth - in (mm)		33 (838)
Shipping Height - in (mm)		80 (2032)
Available Agency Approvals	Electric	C <sup>U</sup> L <sup>U</sup> S
	Gas	C <sup>U</sup> S <sup>A</sup> <sub>U</sub> S

Note: Not all options are available for all models. Twelfth digit in model number indicates US or Canadian unit. C=Canada & T=US. Refer to the price list for the available models and options.  
ADA Compliant

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management system of Alliance Laundry Systems' Ripon facility has been registered to ISO 9001:2008.

©Copyright 2018 Alliance Laundry Systems LLC



AH18-0034